



REVISIONS				
ECD	REV	DESCRIPTION	DATE	APPROVED

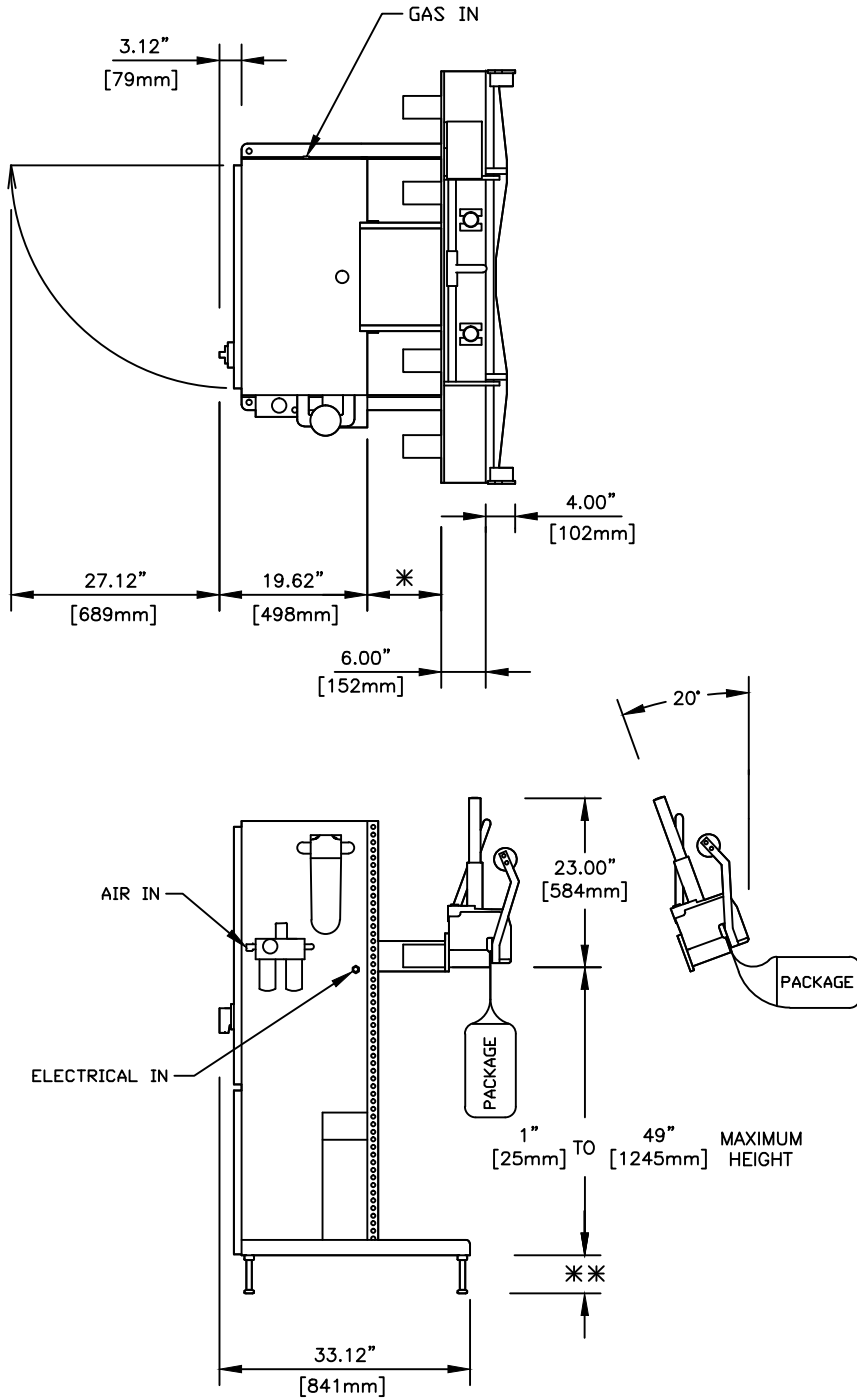

Comvac MARK III

- * { 10.00" [254mm] HEAD SPACER @ VERTICAL POSITION
9.50" [241mm] HEAD SPACER @ 20° POSITION
9.00" [229mm] POWERED HEAD MOUNT
11.62" [295mm] 20° POWERED HEAD MOUNT
- ** { 4.62" [112mm] STAINLESS STEEL LEVELING FEET (SHOWN)
6.56" [167mm] STAINLESS STEEL CASTORS
- *** { 31.88" [810mm] 29"/30" HEAD
56.25" [1429mm] 53"/54" HEAD
64.00" [1626mm] 61 1/2" HEAD

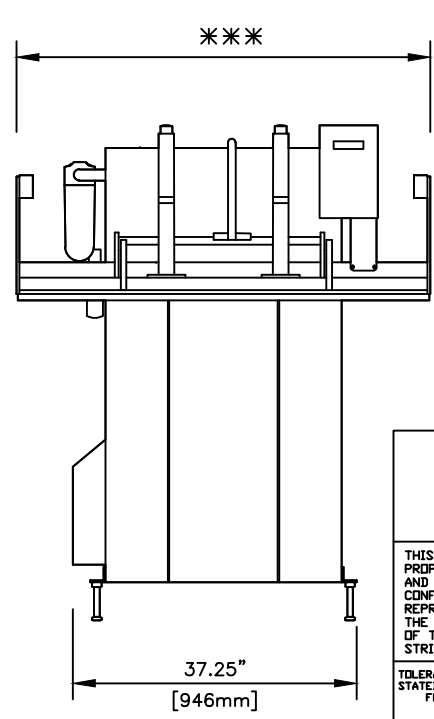

THIS DRAWING IS THE PROPERTY OF M-TEK, INC. AND IS TO BE CONSIDERED CONFIDENTIAL. USE OR REPRODUCTION WITHOUT THE EXPRESS PERMISSION OF THE COMPANY IS STRICTLY PROHIBITED.

APPROVED MFG: _____ APPROVED ENG: _____
DRAWN BY: D. WATKINS

TITLE: **Comvac MARK III**

TOLERANCES: UNLESS OTHERWISE STATED:
FRACTIONAL = ±.015
XX = ±.015
XXX = ±.005
DRILLED HOLE: STANDARD S.A.E.

DWG NO: BROMK3MC	REV -
SCALE: 1" = 12"	DATE: 3/4/97
SHEET 1	OF 1